




# minet

## CARTON TUBE WINDER BELT

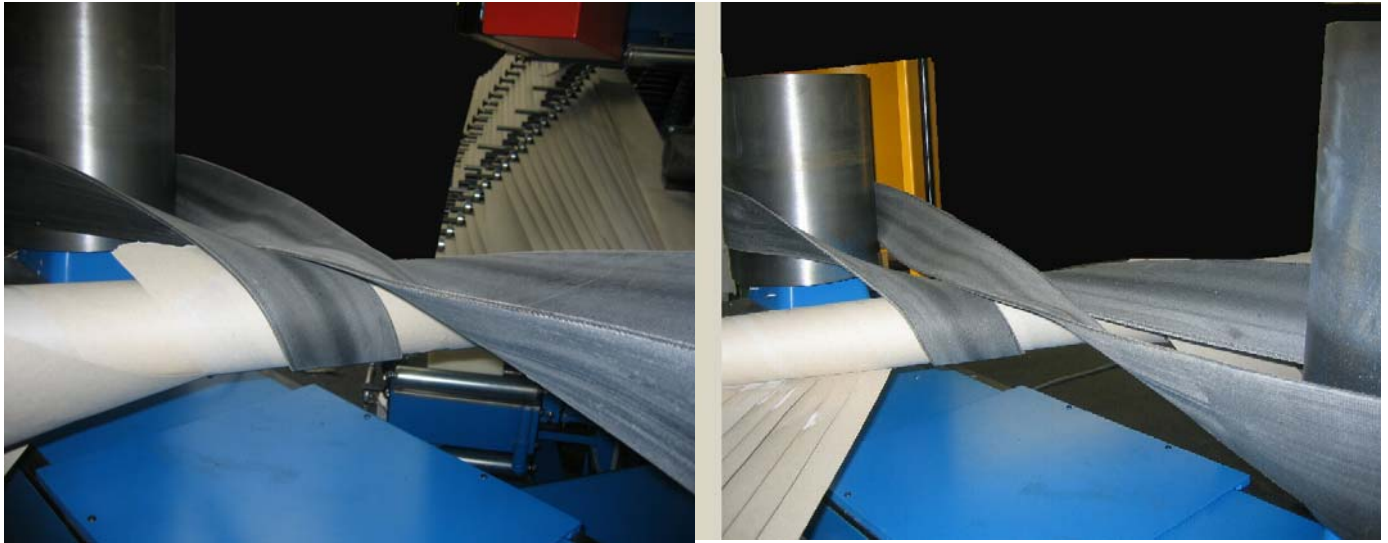

### MANUFACTURED ENDLESS WITH LACING UNDER TENSION

<b>ENDLESS LENGTH:</b>	up to 32 meters (*)
<b>WIDTH:</b>	from 30 to 500 mm
<b>CARCASS:</b>	truly endless with spiralled cord reinforcement, protected on top and underneath by a covering fabric, with a high friction coefficient & static electricity conductivity
<b>CHARACTERISTICS:</b>	high working tension abrasion resistant throughout/hard wearing no snapping flexible: small pulley diameters very high resistance to speed variations non marking reversal possible for reuse
<b>PERSONAL FINISHING:</b>	added rubber cover on the 2 sides of the belt

\* measured inside with the belt laid flat

# minet

# CARTON TUBE WINDER BELT



## RANGE OF PRODUCTS

Type			SF 1	SF 3	SF 5	SF 7	SF 18
carcass (cord)			Rayon	Rayon	Rayon	Aramid	Polyester
operating tension	N/mm	up to	60	60	80	138	55
elongation under tension	%	less than	0.7	0.7	0.6	0.4	0.8
speed	m/s	up to	60	60	60	60	60
minimum pulley Ø	mm		100	100	115	160	120
belt thickness	mm	+/- 0.5	3.5	5.0	5.0	5.0	3.3
weight	Kg/m <sup>2</sup>	approx.	4.4	6.0	5.9	5.9	4.3

## MANUFACTURING CAPACITIES

Endless lengths (+/- 0.75 %)	Maximum widths (+/- 3 mm)
from 1 050 to 1 200 mm	220 mm
from 1 200 to 1 600 mm	190 mm
from 1 600 to 2 250 mm	330 mm
from 2 250 to 18 000 mm	500 mm
from 18 000 to 32 000 mm	400 mm